


# 篮球比分 APP 使用说明书



无线控制24秒  
Wireless control for 24 seconds

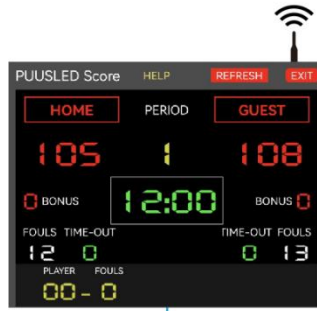

无线控制24秒  
Wireless control for 24 seconds



手机软件操作  
Mobile software control



主控制台  
Master console



- 1、手机上下载安装 PUUSLED Score.
- 2、把比分屏主屏、篮板 24 秒屏，连接到同一公共 WIFI 上。每个屏固定 1 个静态 IP。

1) 连接比分屏 WIFI，( 比分屏 WiFi 是以 QiWiFiXXXX 命名的，在出厂标签可以看到 )，WiFi 默认密码为：  
**puusLED538**，链接上后如左图示；

2) 在“开始配置”，找到公共 WiFi (若公共 WiFi 列表没有出现，可以手动输入 WiFi 名)，并输入密码保存，连接成功！



3) 在“参数配置”，



模式-LED，  
波特率 115200，  
登陆包-无，  
时间间隔 0，  
静态 IP (系统自动或是手动配置) 并记住屏的 IP 地址，  
以上，比分屏连接完成，保存退出。


3、控制手机也连接到和比分屏的同一公共 WIFI 上。

4、完成以上，就可以打开手机 APP 操作比分屏。

1) 在“SETTING”，输入刚刚记下的 IP 地址（可以输入多个屏的）；


在“basic”，设置每节比赛时间、犯规次数、队名大小，犯规规则，确认密码：123456（原始密码），保存并退出；

在“SCAN”的“SCAN NETWORK”可查看已连接上同一公共 WiFi 的比分屏 IP；

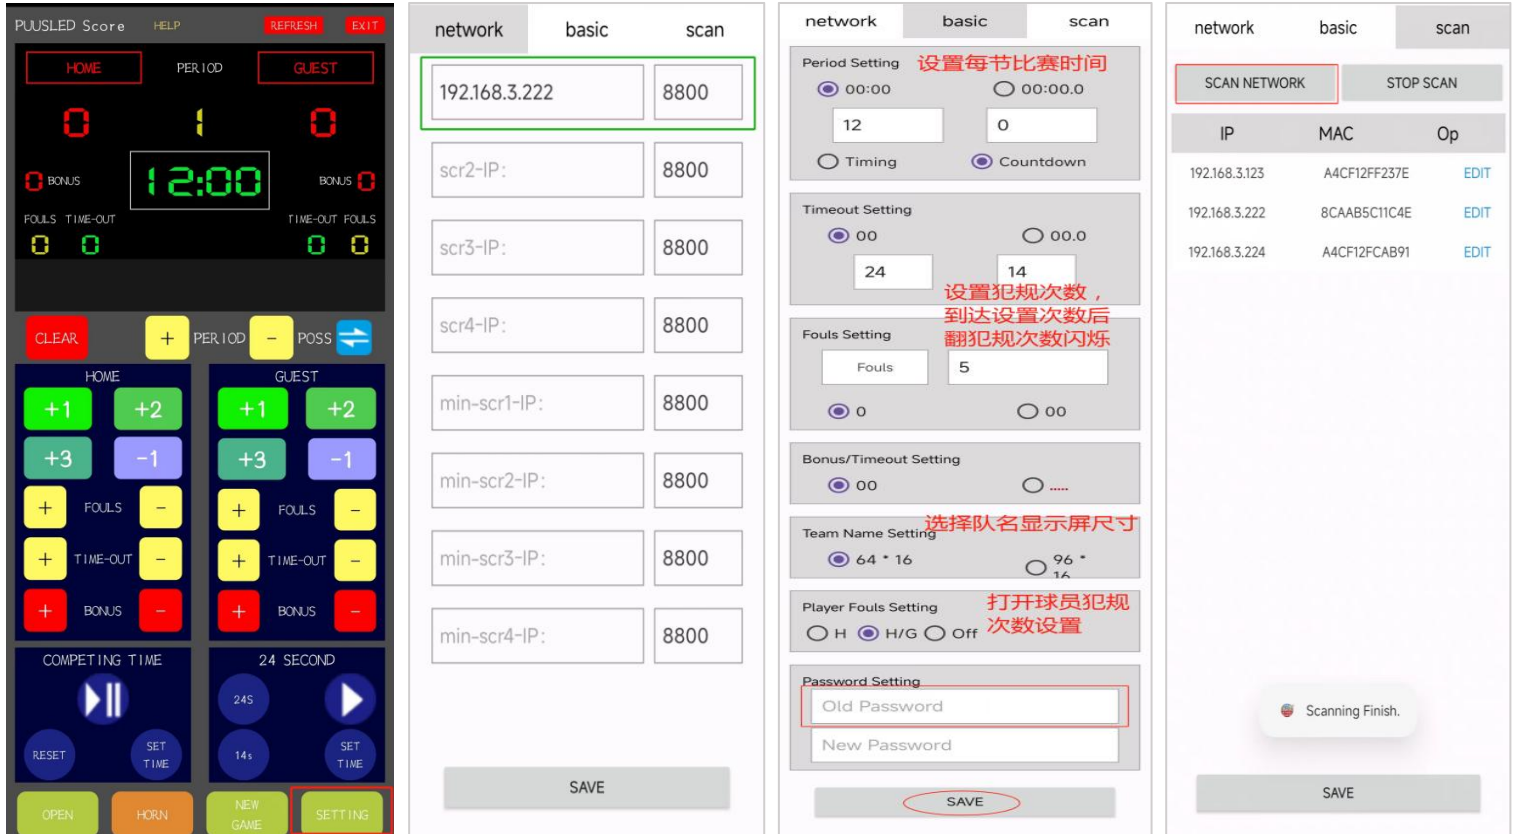

2) “SETTING”完成后，就可以打开比赛软件界面了。进入软件后，若显示屏在线的，“REFRESH”按钮显示绿色，若是显示红色则表示比分屏不在线还没有连接上，需要再检查设置或是设备电源。

3) “NEW GAME”新建一场比赛，“OPEN”打开一场比赛。

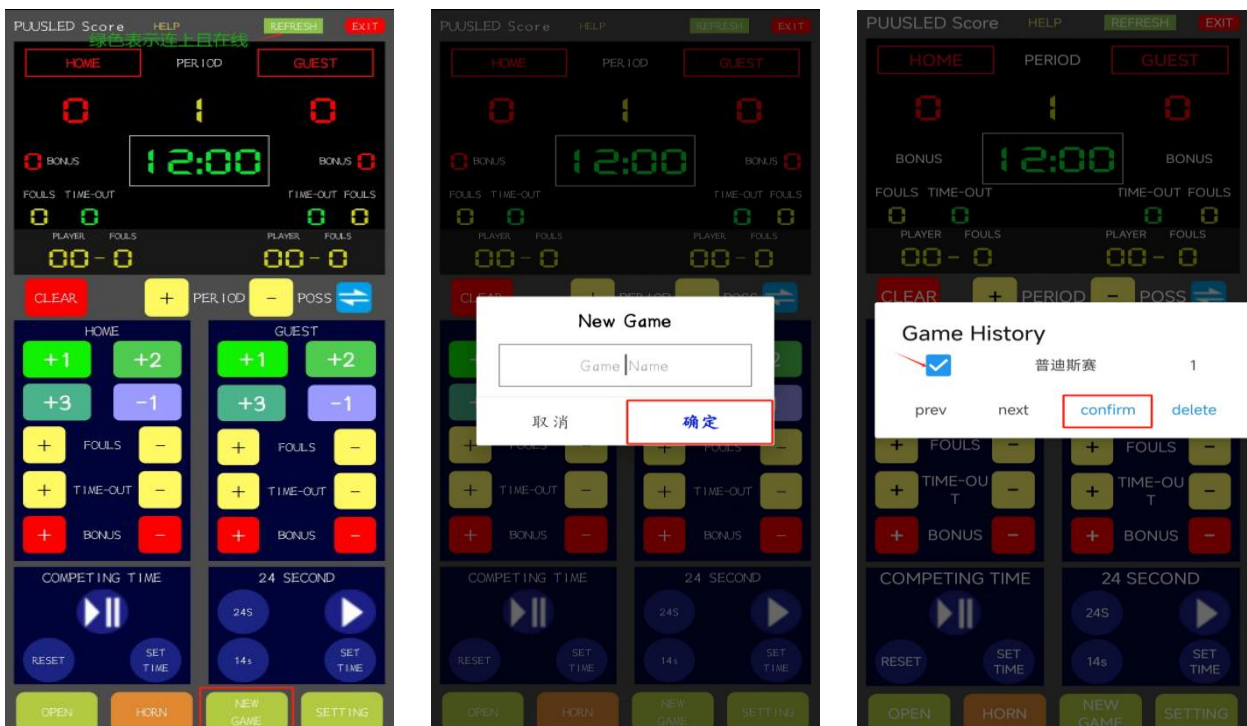

# PUUSLED Score APP 功能详细说明：

(注：软件运行期间，请不要进行其他操作，比赛界面最前面运行，后台运行有可能会闪退。)

向左滑动，  
就可以看到  
每节比赛的成绩：

显示绿色和屏连接上且在线

主场客场队名：点击红色框分别输入

球员犯规的次数：点击数字位置编辑

比分场次

球权：转换主场/客场球权

分数清零 犯规清零 暂停清零

主场/客场比分，  
犯规次数，暂停次数，罚球个数

24 秒/14 秒计时，  
SET TIME：可进入设置时间

比赛时间计时/暂停  
RESET：时间重置  
SET TIME：可进入设置时间

已新建好的 喇叭 新建比赛名称  
比赛选择

PUUSLED Score HELP REFRESH EXIT

HOME PERIOD GUEST

7 < 1 4

BONUS 1 2 BONUS 2

00:42

FOULS TIME-OUT TIME-OUT FOULS

1 2 3 1

PLAYER FOULS PLAYER FOULS

16-3 00-0

PERIOD 1 7:4

---

PUUSLED Score HELP REFRESH EXIT

HOME PERIOD GUEST

8 > 2 9

BONUS BONUS

00:39

FOULS TIME-OUT TIME-OUT FOULS

2 2 1 2



PLAYER FOULS PLAYER FOULS

4-1 00-0

PERIOD 1 7:4

PERIOD 2 8:9

# PUUSLED Score APP Operation instructions

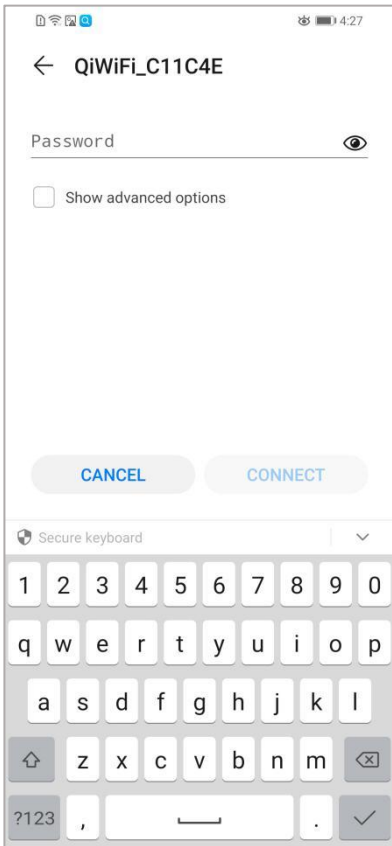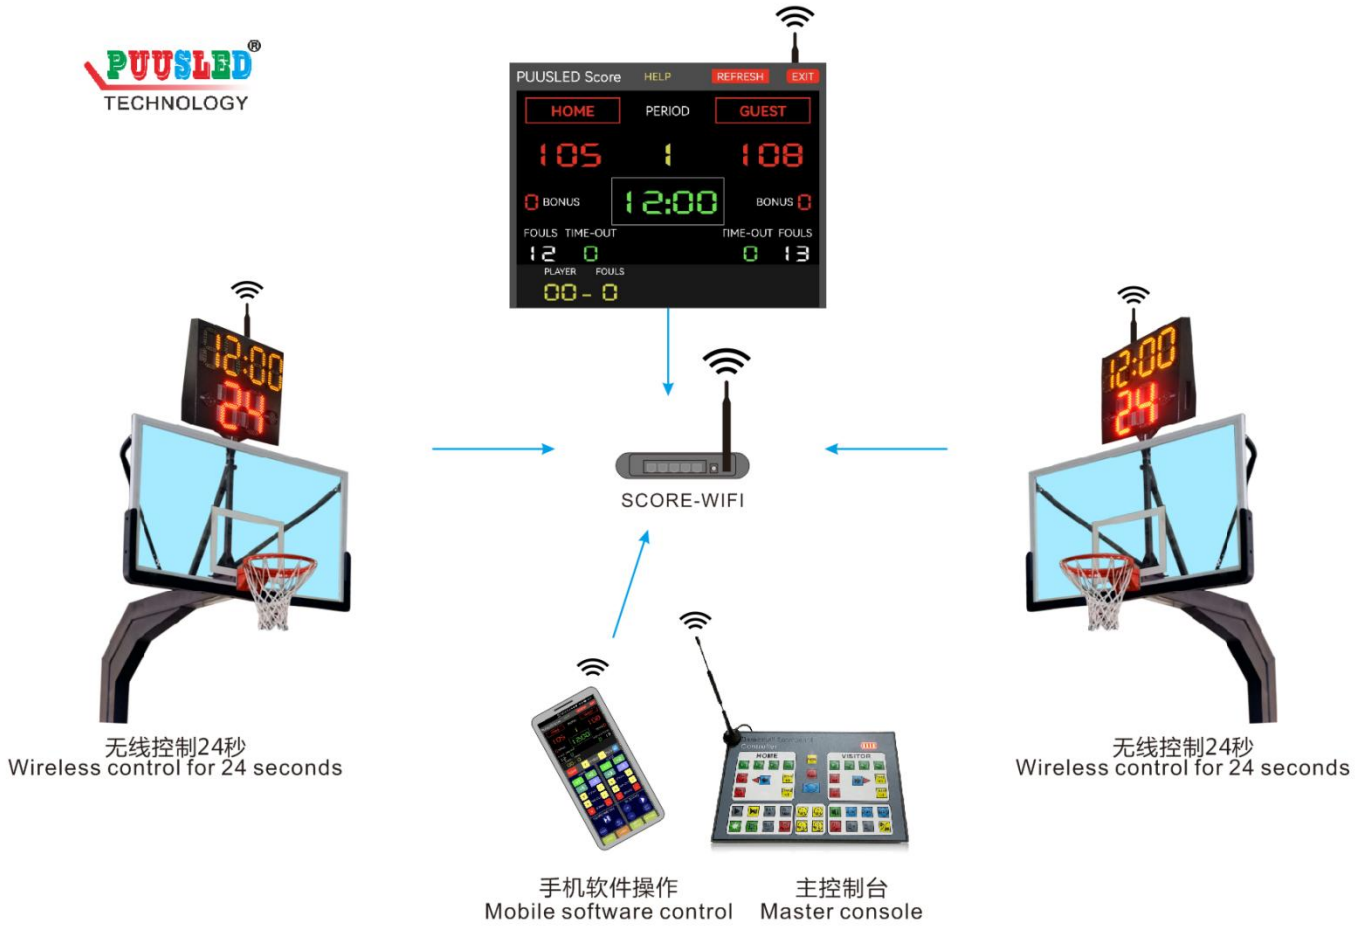

1. Download and install **PUUSLED Score** on your phone.

2. Connect the score screen main screen and the 24-second rebound screen to the same **public WiFi**. **Each screen has a fixed static IP.**

1) Connect to the score screen WiFi (the score screen WiFi is named QiWiFiXXXX, which can be seen on the factory label). The default WiFi password is: **puusLED538**. After connecting, it will be as shown on the left.

2) In "Start Configuration", find the public WiFi (if the public WiFi list does not appear, you can manually enter the WiFi name), enter the password to save, and the connection is successful!

### WIFI模块配网V1.09

当前SSID: PUUSLED  
连接状态: 已连接  
控制卡状态: 已连接 波特率 115200

开始配置 Start configuration  
参数配置 Parameter configuration  
NTP配置  
固件升级  
重启设备

English(en\_US) ▾

build at Aug 1 2024 14:04:31

WIFI名称 PUUSLED  
WIFI密码 输入WiFi密码 Password  
确认提交  
选择附近的WiFi信号  
Total APs scanned = 21

	SSID	RSSI	Authmode	Channel
<input checked="" type="radio"/>	PUUSLED	-50	WPA_WPA2_PSK	1
<input type="radio"/>	ChenJian	-57	WPA_WPA2_PSK	9
<input type="radio"/>	CMCC-Yeq6	-68	WPA_WPA2_PSK	5
<input type="radio"/>	zhibojian	-70	WPA_WPA2_PSK	1
<input type="radio"/>	YL1989.CN_Guest	-76	WPA2_PSK	1
<input type="radio"/>	XGLH	-76	WPA_WPA2_PSK	1
<input type="radio"/>	YL1989.CN	-77	WPA2_PSK	1
<input type="radio"/>	DIRECT-9E-EPSON-BE4A72	-77	WPA2_PSK	6
<input type="radio"/>	DIRECT-9E-EPSON-B6775D	-79	WPA2_PSK	1
<input type="radio"/>	YL1989.CN_Guest	-79	WPA2_PSK	1
<input type="radio"/>		-79	WPA2_PSK	1

### WIFI模块配网

WIFI名称:PUUSLED  
连接成功!

重新配置  
返回/Return

3) In "Parameter Configuration",

### 参数配置

模式: LED ▾  
波特率: 115200 ▾  
登录包: 无 ▾  
时间间隔(单位秒): 0

### 网络参数

静态IP: 静态 ▾  
MAC地址: 8c:aa:b5:c1:1c:4e  
IP地址 192.168.3.222  
掩码地址 255.255.255.0  
网关 192.168.3.1  
主DNS 0.0.0.0  
备用DNS 0.0.0.0

确认提交/Save  
返回/Return

Mode-LED;  
Baud rate 115200;  
Login package-none;  
Time interval 0;  
Static IP (automatic or manual configuration by the system)  
And remember the IP address of the screen.  
The above, the score screen connection is completed, save and exit.


3. The control phone is also connected to the same public WIFI as the score screen.
4. After completing the above, you can open the mobile phone APP to operate the score screen.
  - 1)"**SETTING**", enter the IP address you just wrote down (you can enter multiple screens);
    - "**basic**", set the game time, number of fouls, team name, foul rules for each quarter, confirm the password: **123456** (original password), save and exit;
    - "**scan**" : "SCAN NETWORK", you can view the score screen IPs that are connected to the same public WiFi;

IP	MAC	Op
192.168.3.222	8CAAB5C11C4E	<a href="#">EDIT</a>

2) After "SETTING", you can open the game software interface. After entering the software, if the display screen is online, the "REFRESH" button will display green. If it is red, it means that the score screen is not online and has not been connected. You need to check the settings or device power again.

3) "NEW GAME" creates a new game, "OPEN" opens a game.


(Note: During software operation, please do not perform any other operations. The competition interface needs to run at the front, and there may be crashes when running in the background.)

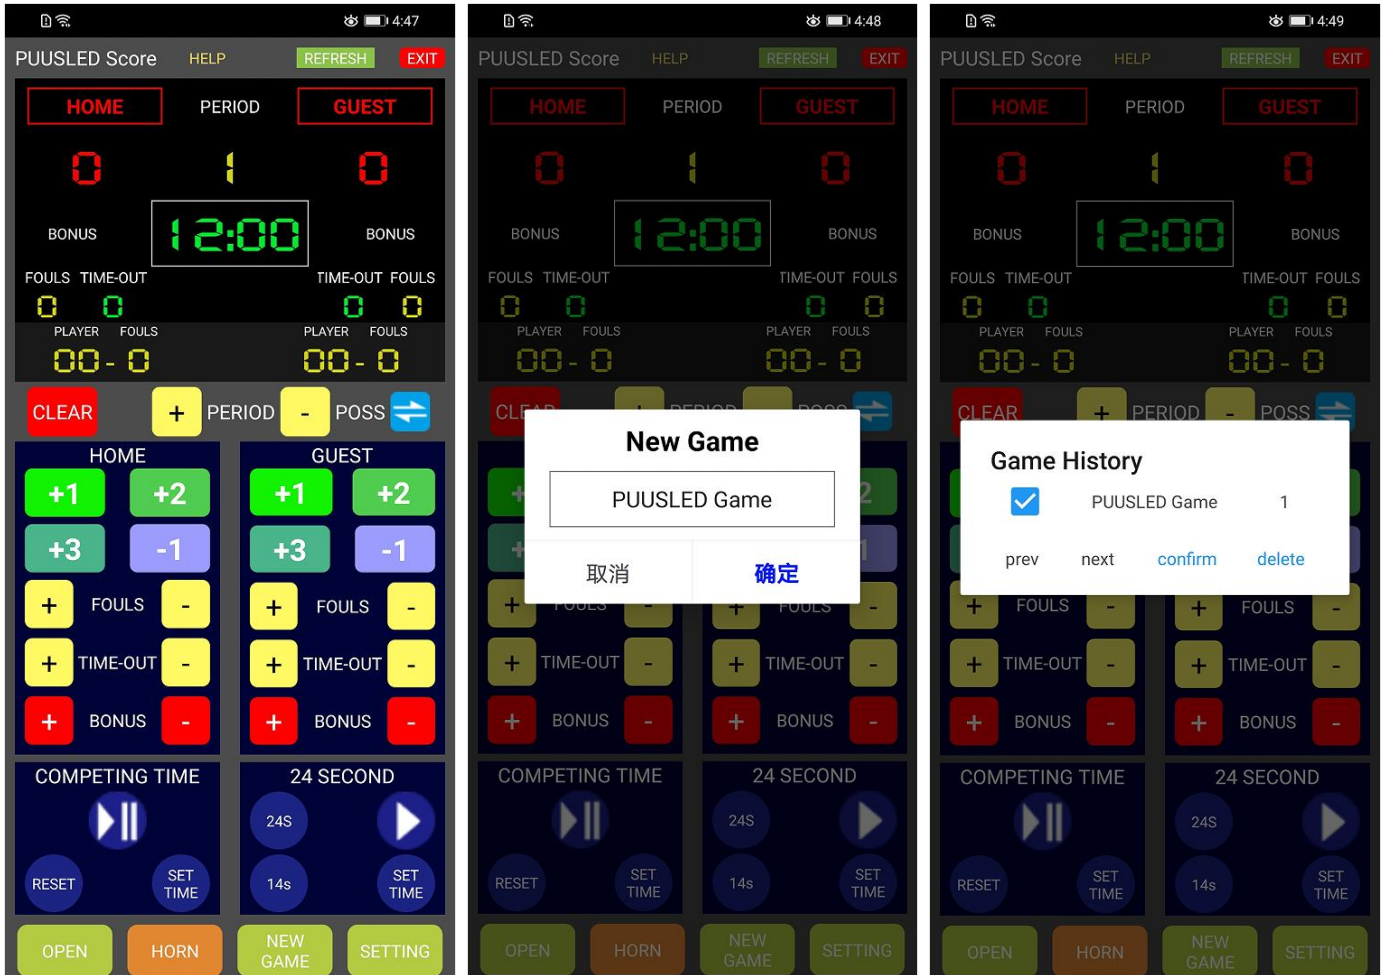

Click the score interface and slide to the left to switch to view the score of each quarter.





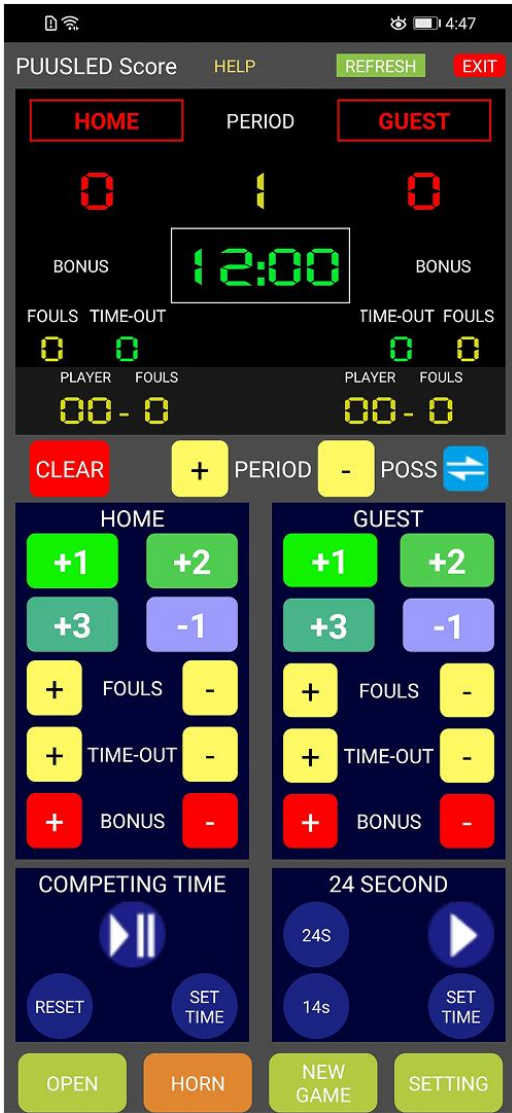

**PUUSLED Score APP function details:**

**REFRESH:** When it displays green, it means that it has been successfully connected to the screen and is online.

**HOME GUEST:** Click the red box to edit the team name.

**PLAYER FOULS:** Click the number position to edit the player number and the number of fouls.

**CLEAR:** Click to choose to clear the score, clear the fouls, and clear the pause.

**COMPETING TIME:** Start/pause the game timer

**RESET:** Reset the time

**SET TIME:** You can enter the time setting

**24 SECOND:** 24 seconds/14 seconds attack timer

**SET TIME:** You can enter the time setting

**OPEN:** Open the newly created game

**HORN:** Horn

**NEW GAME:** Create a new game name

**PUUSLED CO.,LTD**

Add:33rd Building,Zhongnan Gaoke Xinhui Rongzhi Chuangmei Industry Area,Siqian  
Town,Xinhui,Jiangmen,Guangdong,China

Tel:86-750-2633538 2633539

Website:<http://www.puusled.com> <http://www.puusled.com>

Project:86-13189855768 [project@puusled.com](mailto:project@puusled.com)

Service:86-13924680266 [support@puusled.com](mailto:support@puusled.com)

请联系我们：

地址：广东省 江门市，新会融智创美产业谷 33 栋，普迪斯科技

<http://www.puusled.com>,<http://www.puusled.com>

技术联系：13924680266,项目咨询：13189855768

0750-2633058/2633538/2633193/2633194